

Work Order ID 149296

Thursday, July 21, 2016 3:22:02 PM

149296

U/R

Page 1

Item ID: D4095-051

Accept

N900040100

Setup Start *NS1*

Revision ID:

Stop *NS2*

Item Name: Wearpad Fwd

Start Date: 9/1/2016 Start Qty: 8.00 *8*

Cust Item ID:

Required Date: 9/8/2016 Req'd Qty: 8.00 *8*

Customer:

Reference:

Approvals: Process Plan: **DAS**
21 Date: **JUL 22 2016**
9-89 QC: Date: Tooling: Date: SPC (Y/N): Date:

Run Start *NR1*
 Stop *NR2*

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D4095	C								
100	FLOW WATER JET	0.00							
100									
Waterjet	Memo	0.04							
FLOW CNC Waterjet	1-Cut as per Dwg (D4095-11) Dwg Rev: <u>C</u> Prog Rev: <u>C</u> 2-Deburr if necessary								
110	QC2- Inspect parts off machine FAI/FAIB	0.00							
110									
QC	Memo	0.01							
Quality Control									
120	QC8- Inspect parts - second check	0.00							
120									
QC	Memo	0.03							
Quality Control									

AUG 02 2016

DAS
9
9-89

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐																																																													
Date :		Step #:		QTY Effective :			MRB (QS1042) Approval																																																										
Description Work Order Deviation				Disposition				Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval																																																									
Root Cause		FAULT CATEGORY																																																															
Environment ☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐	Design ☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐	Doc/Data ☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐	Equip/Tooling ☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐	Handling/Pre ☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐	Material ☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐	Internal Transport ☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐	Tribal Knowledge ☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐	LOA ☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐	Substation ☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐	Past Expiry Date ☐	Manufacturing Process ☐	OTHER : _____			
Misidentified ☐	Past Due ☐																																																																

Work Order ID 149296

Thursday, July 21, 2016 3:22:02 PM

149296

Page 2

Item ID: D4095-051

Accept

N9000040100

Setup Start ***NS1***

Revision ID:

Stop ***NS2***

Item Name: Wearpad Fwd

Start Date: 9/1/2016 Start Qty: 8.00 ***8***

Cust Item ID:

Required Date: 9/8/2016 Req'd Qty: 8.00 ***8***

Customer:

Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Run Start ***NR1***
Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130 *130* Brake NC Brake NC	Form as per dwg NC BRAKE Memo	0.00 0.01			DAS 30 9-89	10			AUG 16 2016
140 *140* QC Quality Control	QC5- Inspect part completeness to step on W/O Memo	0.00 0.03				(10)			DAS 38 9-89 AUG 16 2016
150 *150* HandFinish Hand Finishing	 Memo COAT ENTIRE TOP (CONCAVE) SURFACE WITH ROCKGUARD AS PER DWG A/R ROCKGUARD BATCH: 135064	0.00 0.09				10			DAS 41 9-89 13-8-17

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval 		
Description Work Order Deviation				Disposition					
							Completed By _____		
							Lead hand / Supervisor Approval Verification		
							QC / QA Coordinator Approval		

Root Cause			FAULT CATEGORY					
Environment ☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐			
Design ☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐			
Doc/Data ☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐			
Equip/Tooling ☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐			
Handling/Pre ☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐			
Material ☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐			
Internal Transport ☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐			
Tribal Knowledge ☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐			
LOA ☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐			
Substation ☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐			
Past-Expiry Date ☐	Manufacturing Process ☐	OTHER : _____						
Misidentified ☐	Past Due ☐							

Work Order ID 149296

Thursday, July 21, 2016 3:22:02 PM

149296

Page 3

Item ID: D4095-051

Accept

N900040100Setup Start ***NS1***

Revision ID:

Stop ***NS2***

Item Name: Wearpad Fwd

Start Date: 9/1/2016 Start Qty: 8.00 ***8***

Cust Item ID:

Required Date: 9/8/2016 Req'd Qty: 8.00 ***8***

Customer:

Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Run Start ***NR1***
Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
160	QC3- Inspect Part Finish	0.00							
160									DAS
QC	Memo	0.01							38
Quality Control									9-89
									AUG 18 2016
170	Identify as per dwg & Stock Location: <u>FP-001</u>	0.00							
170									
Packaging	Memo	0.01							
Packaging	LOCATION : FP001								
180	QC21- Final Inspection - Work Order Release	0.00							
180									
QC	Memo	0.13							
Quality Control									

DAS
21
9-89

AUG 19 2016

DAS
21
9-89

AUG 19 2016

AUG 19 2016

x10 of 10 16/08/19

DQA: _____ Date: _____

WORK ORDER NON-CONFORMANCE / UPDATE



QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date : _____		Step #: _____		QTY Effective : _____			MRB (QSI042) Approval		
Description Work Order Deviation				Disposition				Completed By	
								Lead hand / Supervisor Approval Verification	
								QC / QA Coordinator Approval	
Root Cause		FAULT CATEGORY							
Environment ☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐				
Design ☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐				
Doc/Data ☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐				
Equip/Tooling ☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐				
Handling/Pre ☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐				
Material ☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐				
Internal Transport ☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐				
Tribal Knowledge ☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐				
LOA ☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐				
Substation ☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐				
Past Expiry Date ☐	Manufacturing Process ☐	OTHER : _____							
Misidentified ☐	Past Due ☐								

Picklist Print

Thursday, July 21, 2016 3:22:01 PM

Page 1

Work Order ID: 149296

149296

Parent Item: D4095-051

D4095-051

Parent Item Name: Wearpad Fwd

Start Date: 9/1/2016

Required Date: 9/8/2016

Start Qty: 8.00

Required Qty: 8.00

Comments: IPP rev.A 11.11.07 new issue EC verified by:JLM

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
M304S16GA		Purchased	No				sf	90.2498		1.56			

M304S16GA

304/316 Sheet .063

**

ac 16/07/30

Location

Loc Qty

Loc Code

MAT010

73.75

m134677

4.27

m134982

5.48

m135061

64

TPI

16.499794

m134604

16.499794

2.2

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval		
Description Work Order Deviation				Disposition					

Root Cause			FAULT CATEGORY																																																												
Environment ☐	Design ☐	Doc/Data ☐	Equip/Tooling ☐	Handling/Pre ☐	Material ☐	Internal Transport ☐	Tribal Knowledge ☐	LOA ☐	Substation ☐	Past Expiry-Date ☐	Misidentified ☐	No Re-verification ☐	Operator ☐	Offset/Setup ☐	Supplier ☐	Training ☐	Use for Testing ☐	Poor Information ☐	Rushing ☐	Product Improvement ☐	Process Improvement ☐	Manufacturing Process ☐	Past Due ☐	Pressure/Forced ☐	Bending ☐	Centre Not Concentric ☐	Cracks ☐	Crimp/Kink/Ripple/Wave ☐	Cuffs ☐	Crushing ☐	Heat Treat ☐	Wave/Twist in Tube ☐	Marks/Chatter ☐	Temperature/Cure ☐	Set-up ☐	BOM/Route ☐	Broken/Damage/Defect ☐	Inspection Incomplete/Unqualified ☐	Contamination ☐	Countersink ☐	Cut Too Short ☐	Instructions Incomplete/Unclear ☐	Drill Holes ☐	Power Loss/Surge ☐	Folio/Program ☐	Grain ☐	Weld ☐	Wrong Stock Pulled ☐	Out of Sequence ☐	Off-set ☐	Mislabeled ☐	Fit/Function ☐	Misaligned/off center ☐	Positioned Wrong ☐	Outside Dimensions ☐	Over/Under tolerance ☐	Part Incorrect ☐	Part Lost/Missing ☐	Part Moved ☐	Drawing ☐	Finish ☐	Misread ☐	Turning Sequence ☐
OTHER : _____																																																															

ITEM	QTY -041	QTY -043	QTY -045	QTY -047	QTY -049	QTY -051	PART NUMBER	DESCRIPTION
1	X						D4095-041	WEARPLATE ASSEMBLY
2		X					D4095-043	WEARPLATE ASSEMBLY
3			X				D4095-045	WEARPLATE ASSEMBLY
4				X			D4095-047	WEARPAD ASSEMBLY
5					X		D4095-049	WEARPAD ASSEMBLY
6						X	D4095-051	WEARPAD ASSEMBLY
7	1						D4095-1	WEARPLATE
8		1					D4095-3	WEARPLATE
9			1				D4095-5	WEARPLATE
10				1			D4095-7	WEARPAD
11					1		D4095-9	WEARPAD
12						1	D4095-11	WEARPAD

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 149296 ML5
16-07-22

D4095-041/-043/-045/-047/-049/-051 NOTES:

- 1) MATERIAL: N/A
- 2) FINISH: COAT ENTIRE TOP (CONCAVE) SURFACE WITH TEXTURED COATING 0.02-0.04 THICK, PER DART QSI 005 4.9
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D4095-0XX" AND B/N "BX000X" USING REMOVABLE TAG PER QSI 044 6.6
- 7) WEIGHT: D4095-041 = 3.08 lbs; D4095-043 = 3.08 lbs; D4095-045 = 2.00 lbs; D4095-047 = 0.48 lbs; D4095-049 = 0.42 lbs; D4095-051 = 0.37 lbs
- 8) PARTS ARE SYMMETRIC ABOUT CENTERLINE

UNDER REVIEW


URF 16-572 ML

16.05.03




RELEASED
2016-01-11
ECN 16-504

C	8259 WELD ROD WAS 2059B, 0.20 WELD THICKNESS WAS 0.25, MOVE DRAIN HOLE IN -1/-3, 0.9 WAS 2.00 (TYPO B4-9), ADJUST TOL. FOR MANUFACTURABILITY, NOTE 2 NOW REF'S QSI 005 4.9, UPDATE MAT'L SPEC	CP	16.01.08
B	REVISED D4095-1/-1F/3/3F; 4716 PLUS ONE ROCK-GUARD REPLACES D4096-1/-3; ADDED D4095-6/-7 -8/-11; REVISED HARDCOAT DESIGN; REVISED NOTE 2	XDF	11.10.18
A	NEW ISSUE	MB	10.04.20
REV.	DESCRIPTION	BY	DATE
DESIGN			
DRAWN			
CHECKED			
MFG. APPR.			
APPROVED			
DE APPR.			
DATE	16.01.06		

DART AEROSPACE USA, INC EUGENE, OR	
DRAWING NO. D4095	REV. C SHEET 1 OF 9
TITLE WEARPLATE	SCALE NTS
COPYRIGHT © 2010 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

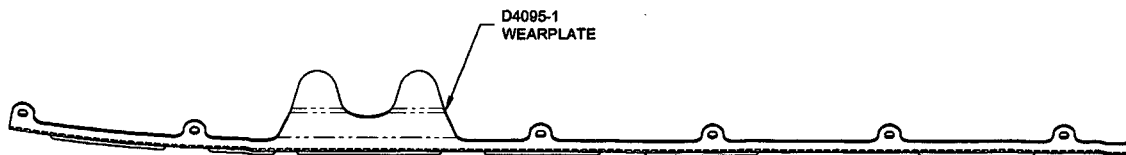


D4095-041 WEARPLATE ASSEMBLY

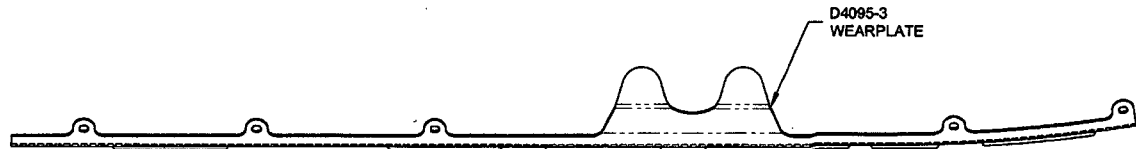

D4095-043 WEARPLATE ASSEMBLY



D4095-045 WEARPLATE ASSEMBLY




UNDER REVIEW



URF 16-572 ML
16.05.03

RELEASED
2016-01-11



DESIGN		DART AEROSPACE USA, INC	
DRAWN		EUGENE, OR	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D4095	SHEET 2 OF 9
APPROVED		TITLE	SCALE
DE APPR.		WEARPLATE	NTS
DATE	16.01.06	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMBINED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	




D4095-047 WEAR PAD ASSEMBLY



D4095-049 WEAR PAD ASSEMBLY

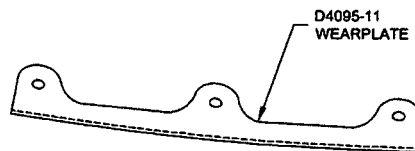

D4095-051 WEARPAD ASSEMBLY




UNDER REVIEW

URF 16-572 ML


16.05.03

RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC	
DRAWN		EUGENE, OR	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D4095	SHEET 3 OF 8
APPROVED		TITLE	SCALE
DE APPR.		WEARPLATE	NTS
DATE	16.01.06	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

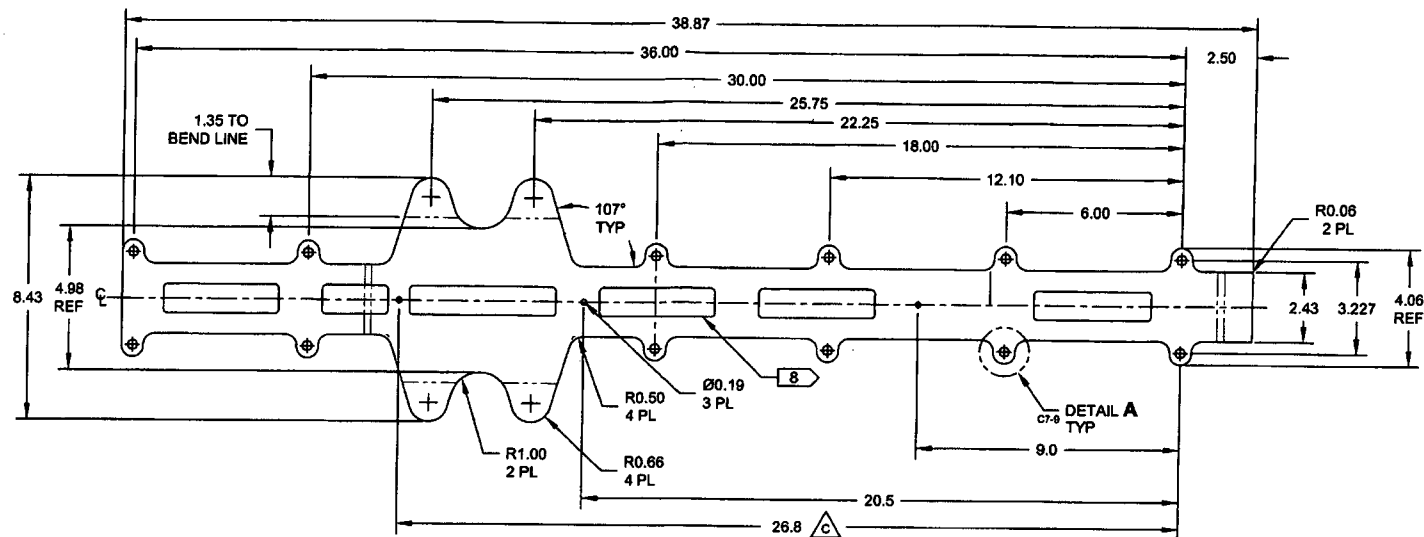

D4095-1F FLAT PATTERN 1

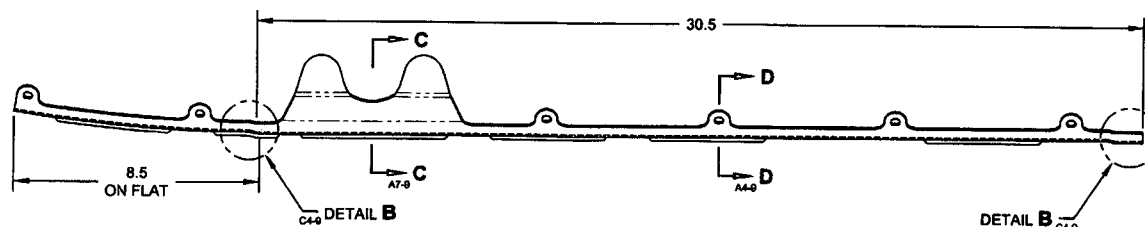

D4095-1 BENDING DETAIL
(MAKE FROM D4095-1F)

D4095-1 NOTES:

- 1) MATERIAL: AISI 304/316 SS SHEET ANNEALED 2B FINISH, 16 GAUGE (0.063 THICK)
PER MIL-S-5059 OR AMS 5513 (304) OR AMS 5524 (316), OR ASTM A240
OR ASME SA240 REF DART MATERIAL SPEC M304S16GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.015 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: N/A
- 8) WELDING: BUILDUP HARD SURFACING 0.17 TO 0.20 THICK USING 8259 ROD PER QSI 004 SECTION 4.5
- 9) PARTS ARE SYMMETRIC ABOUT CENTERLINE

UNDER REVIEW


URF 16-572 ML

16.05.03


RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC
DRAWN		EUGENE, OR
CHECKED		REV. C
MFG. APPR.		SHEET 4 OF 9
APPROVED		TITLE
DE APPR.		WEARPLATE
DATE	16.01.06	NTS

COPYRIGHT © 2010 BY DART AEROSPACE USA, INC
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.

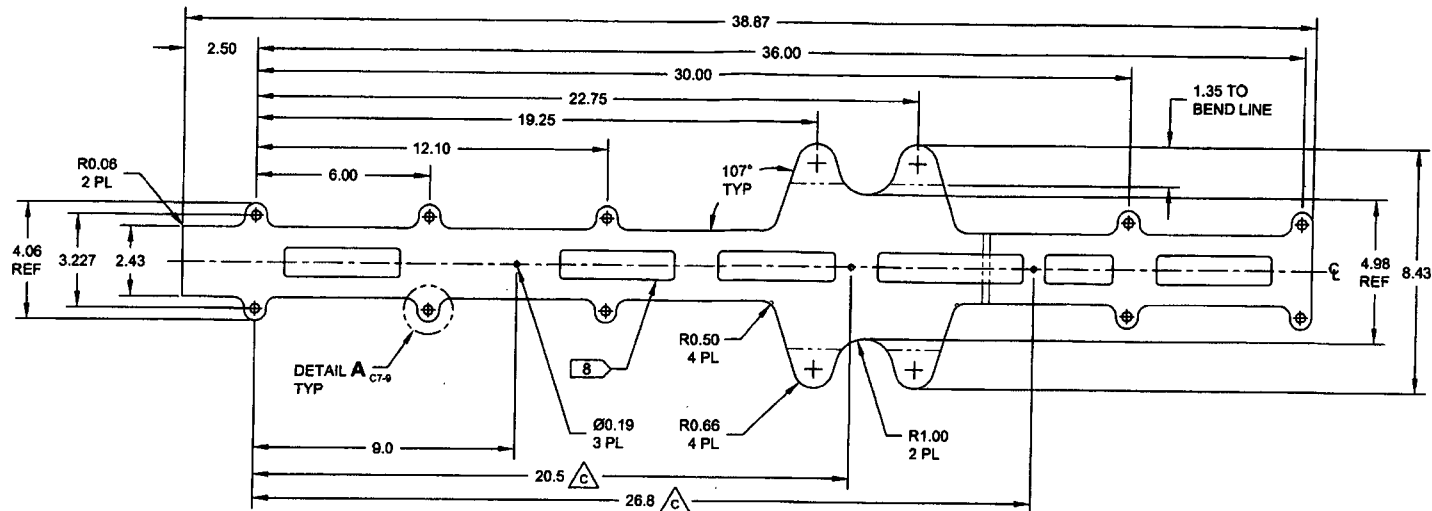

D4095-3F FLAT PATTERN 1

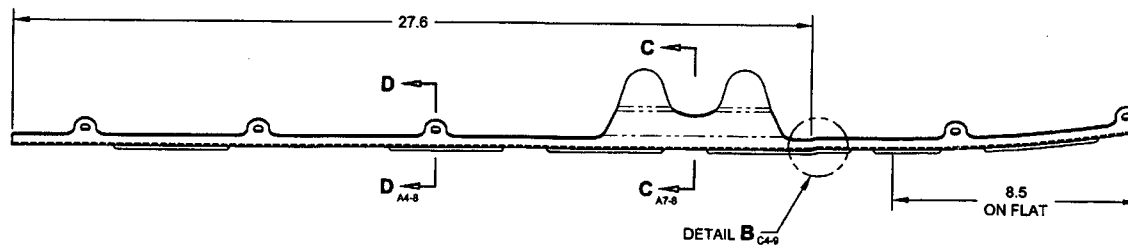

D4095-3 BENDING DETAIL
(MAKE FROM D4095-3F)

D4095-3 NOTES:

- 1) MATERIAL: AISI 304/316 SS SHEET ANNEALED 2B FINISH, 16 GAUGE (0.063 THICK)
PER MIL-S-5059 OR AMS 5513 (304) OR AMS 5524 (316), OR ASTM A240
OR ASME SA240 REF DART MATERIAL SPEC M304S16GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.015 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: N/A
- 8) WELDING: BUILDUP HARD SURFACING 0.17 TO 0.20 THICK USING 8259 ROD PER QSI 004 SECTION 4.5
- 9) PARTS ARE SYMMETRIC ABOUT CENTERLINE


UNDER REVIEW

URF 16-572 ML


16.05.03

RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC	
DRAWN		EUGENE, OR	
CHECKED	ASS	DRAWING NO.	REV. C
MFG. APPR.		D4095	SHEET 5 OF 9
APPROVED		TITLE	SCALE
DE APPR.		WEARPLATE	NTS
DATE	16.01.06	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED IN ANY MANNER WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

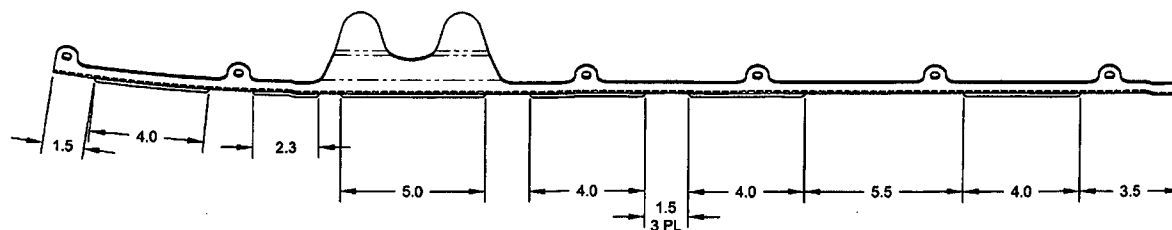

D4095-1 WELDING DETAIL

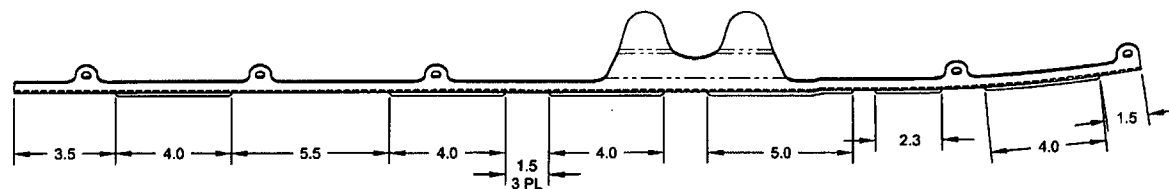


D4095-3 WELDING DETAIL

UNDER REVIEW


URF 16-572 ML
16.05.03

RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC	
DRAWN		EUGENE, OR	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D4095	SHEET 8 OF 9
APPROVED		TITLE	SCALE
DE APPR.		WEARPLATE	NTS
DATE	16.01.06	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

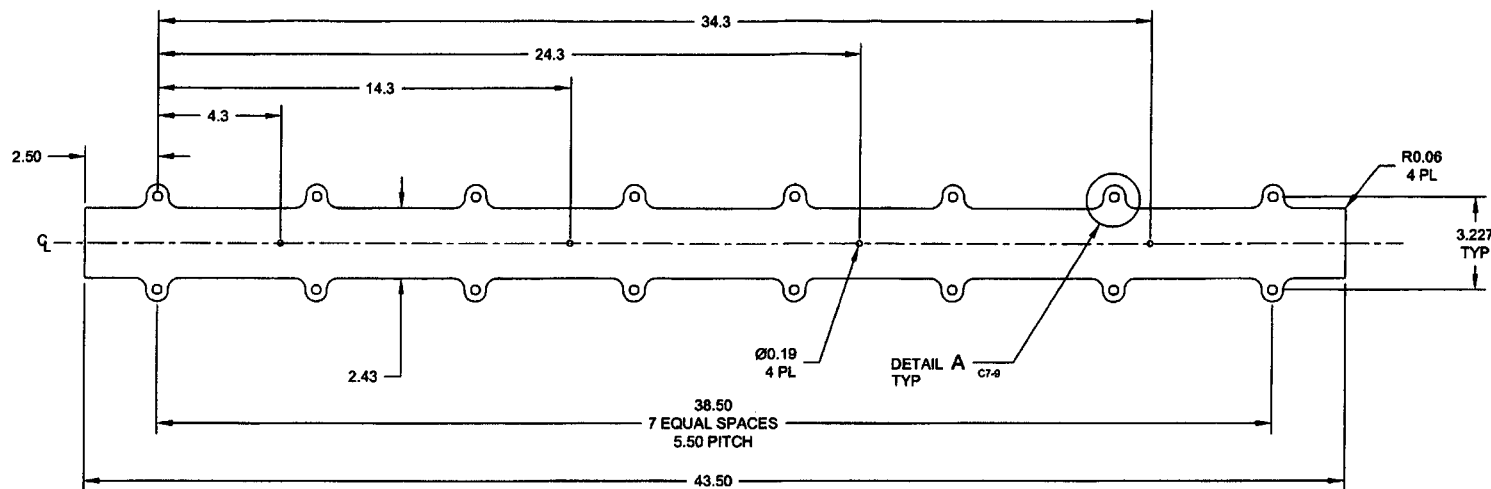

D4095-5F FLAT PATTERN 1

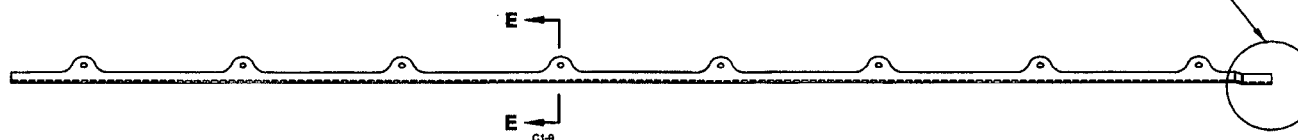

D4095-5 BENDING DETAIL
(MAKE FROM D4095-5F)

D4095-5 NOTES:

- 1) MATERIAL: AISI 304/316 SS SHEET ANNEALED 2B FINISH, 16 GAUGE (0.063 THICK)
PER MIL-S-5059 OR AMS 5513 (304) OR AMS 5524 (316), OR ASTM A240
OR ASME SA240 REF DART MATERIAL SPEC M304S16GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.015 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: N/A
- 8) WELDING: BUILDUP HARD SURFACING 0.17 TO 0.20 THICK USING 8259 ROD PER QSI 004 SECTION 4.5
- 9) PARTS ARE SYMMETRIC ABOUT CENTERLINE

UNDER REVIEW


URF 16-572 ML

16.05.03


RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC
DRAWN		EUGENE, OR
CHECKED		DRAWING NO. REV. C
MFG. APPR.		D4095 SHEET 7 OF 9
APPROVED		TITLE SCALE
DE APPR.		WEARPLATE NTS
DATE	16.01.06	


COPYRIGHT © 2010 BY DART AEROSPACE USA, INC
THIS DOCUMENT IS UNCLASSIFIED AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE USA, INC

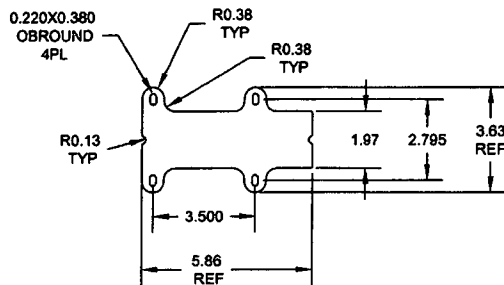


D4095-7F FLAT PATTERN 1

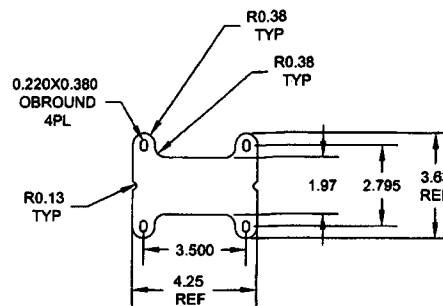


D4095-9F FLAT PATTERN 1

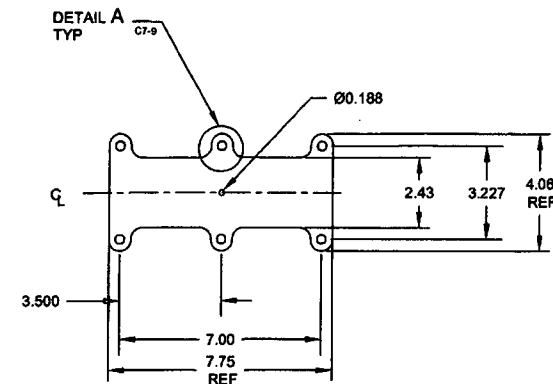


D4095-11F FLAT PATTERN 1



D4095-7 LONGITUDINAL BEND
(MADE FROM D4095-7F)



D4095-9 LONGITUDINAL BEND
(MADE FROM D4095-9F)



D4095-11 BENDING DETAIL
(MAKE FROM D4095-11F)

D4095-7/-9/-11 NOTES:

1) MATERIAL: AISI 304/316 SS SHEET ANNEALED 2B FINISH, 16 GAUGE (0.063 THICK)
PER MIL-S-5059 OR AMS 5513 (304) OR AMS 5524 (316), OR ASTM A240
OR ASME SA240 REF DART MATERIAL SPEC M304S16GA

2) FINISH: NONE

3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED

4) UNITS: INCHES UNLESS OTHERWISE NOTED

5) BREAK SHARP EDGES: 0.005 TO 0.015 MAX

6) IDENTIFICATION: N/A

7) WEIGHT: N/A

8) WELDING: BUILDUP HARD SURFACING 0.17 TO 0.20 THICK USING 8259 ROD PER QSI 004 SECTION 4.5

9) PARTS ARE SYMMETRIC ABOUT CENTERLINE


UNDER REVIEW

URP 16-572 ML
16.05.03

RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC
DRAWN		EUGENE, OR
CHECKED		DRAWING NO. REV. C
MFG. APPR.		D4095 SHEET 8 OF 8
APPROVED		TITLE SCALE
DE APPR.		WEARPLATE NTS
DATE	16.01.06	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC


THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.

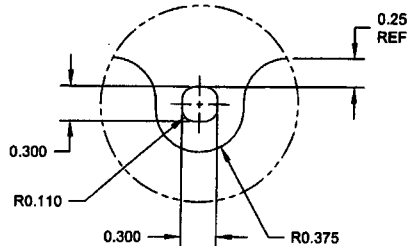

DETAIL A: TAB DETAIL

SCALE 4X


C3-3
C6-5
D3-7
D2-8

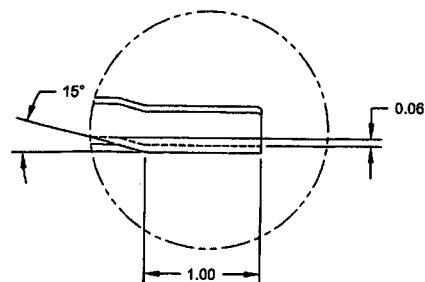

DETAIL B: JOGGLE DETAIL

SCALE 4X


B2-4
B6-4
B3-5
B2-7



SECTION E-E

SCALE 2X


B6-7
B2-8

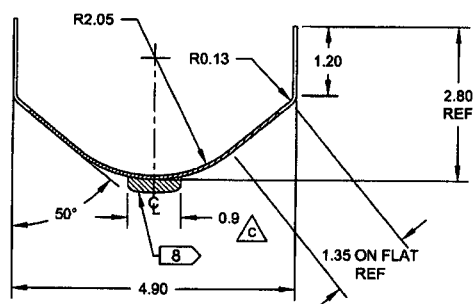

SECTION C-C

SCALE 2X


B5-4
B4-5



SECTION D-D

SCALE 2X

B4-4
B5-5



SECTION F-F

SCALE 2X

B5-3
B7-3

UNDER REVIEW

URF 16-572 ML

16.05.03

RELEASED
2016-01-11

DESIGN		DART AEROSPACE USA, INC
DRAWN		EUGENE, OR
CHECKED	ASS	DRAWING NO. REV. C
MFG. APPR.		D4095 SHEET 9 OF 9
APPROVED		TITLE SCALE
DE APPR.		WEARPLATE NTS
DATE	16.01.06	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.